





**Cable
Tray
電纜托盤**



CT Series 單摺邊
Light duty with single edge
13mm upstand to under 300mm (W)
20mm upstand to 300mm (W) or over
Standard code
CT / width / thickness



RCT Series 20/12 雙摺邊
Heavy duty with return edge
20mm upstand with 12mm return edge
Standard code
RCT / width / thickness

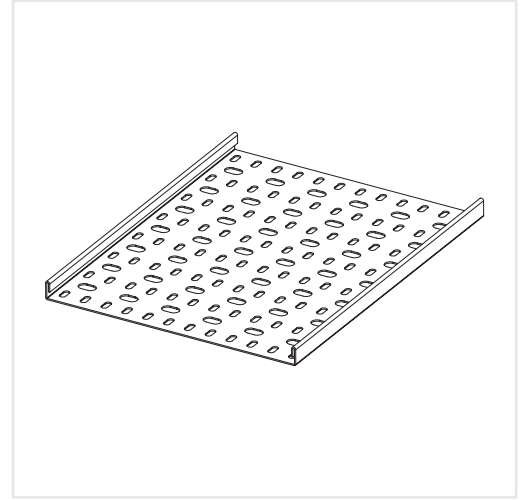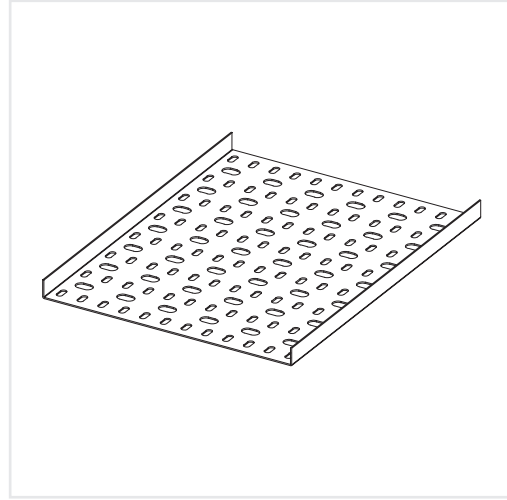

Technical Specification:


- BS EN61537 or IEC61537 to class 5
- Each length supplied with coupler, tinned earth link and fixing screws.
- Standard length is 2.44m/ Non standard thickness and finishes available to clients order.
- Customize size is available for order upon request.

Materials Standard:



- Galvanized Steel Sheet to BS4678 Part 1: Class 3 Protection to BS EN10143 (Coating Mass 275g/m²) Standard product code +/GI
- Mild Steel Sheet to BS1449-1 or BS EN10149-1 finished in Hot-dipped Galvanized after Perforation to ISO1461 Standard product code +/HDG
- Stainless Steel to Grade 304 or Grade 316 Standard product code +/SS304 or +/SS316

Other Material or Coating:

- Aluminum Steel Sheet
- Plastic Coated
- Epoxy / Polyester Powder Coated

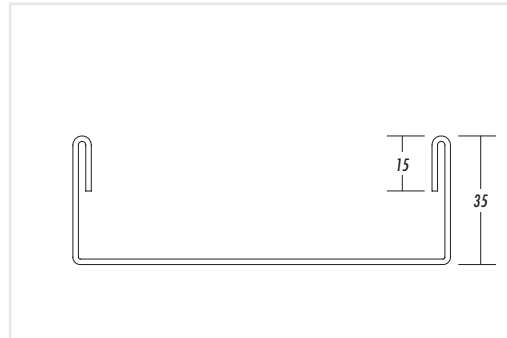

HCT Series 35/15 雙摺邊
Heavy duty with return edge
35mm upstand with 15mm return edge
Standard code
HCT / width / thickness

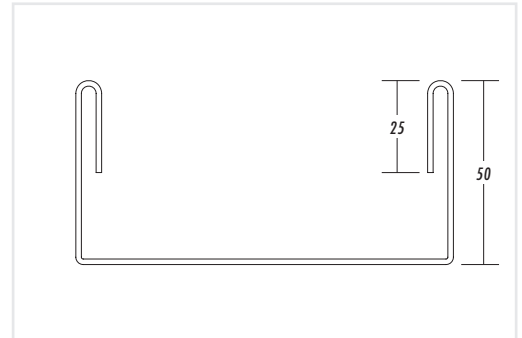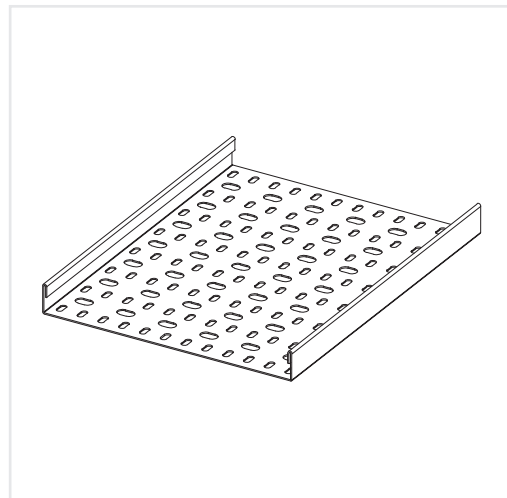

HCT+ Series 50/25 雙摺邊
Extra Heavy duty with return edge
50mm upstand with 25mm return edge
Standard code
HCT / width / thickness-x

